


Operation Manual

Model CA-2x4FN

Fiber Glass High Gain Dual Bander

** Features :

1. Combination of special Power Feeding Section and Phasing Coil realized highest gain VHF/UHF dual bander, firstly in the World.
2. One-piece strong Fiber Glass assures long durability, keeping full resistance against water, salt and/or pollution.
3. Completely factory tuned before delivery and no adjustment is required.

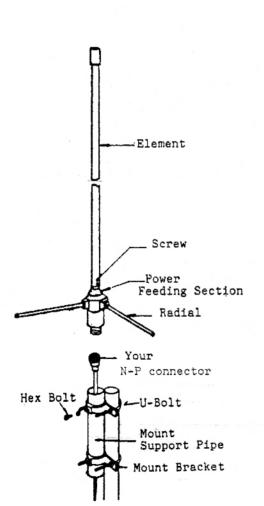

Specifications :

Frequency & Gain : 145MHz/4.5dB 435MHz/7.5dB Impedance : 50 Ohm

V.S.W.R. : Less than 1.5

Max Power : 200 watt

Weight : 1.25 kg

Connector : N- type

Length : 1.80m

Parts List :

No.	Parts Name
001	Element
002	Radials w/nut
003	Power Feeding Section
004	Mount Support Bracket
005	Mount Support Pipe
006	Hex Bolt w/sp. washer M6x8
007	U-bolt w/sp. washer, nut

Kindly use high quality coax. cable, like 3/5/8D2V, to prevent cable loss.

Available mast dia. is 30 -62¢ mm.

Please enjoy using highest quality dual bander, together with Comet Duplexer, Model CF-416, or CF-4160.